
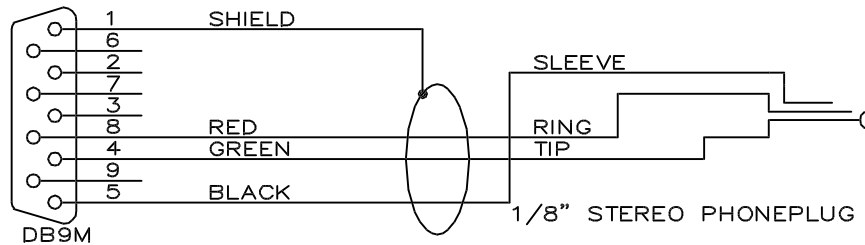



BART C AND D "SER" PORT TO HORITA RM-50 II SERIAL PORT

BART RS-232 SERIALS C AND D DB9F TO HORITA RM-50 1/8" STEREO PHONEJACK STANDARD SERIAL PORT
(REQUIRES A DB9M TO 1/8" STEREO PHONEPLUG ON THE CABLE)


BART SERIAL C

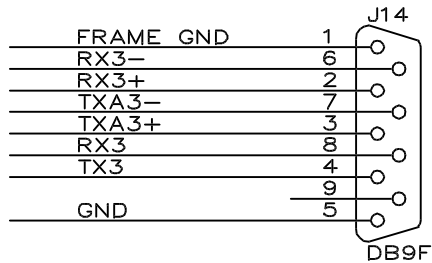

HORITA COMM

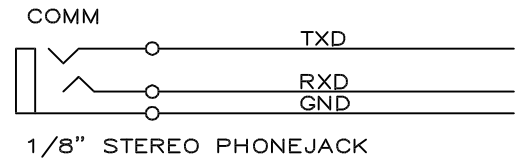

BART SERIAL D

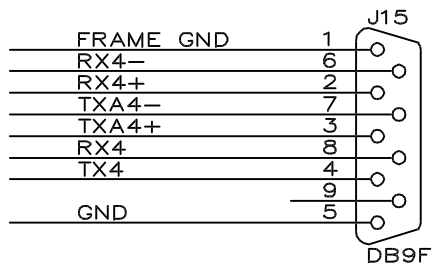

BART DB9F		CABLE	HORITA 1/8" JACK	
SERIAL C	D		PIN	SIGNAL
PIN	SIGNAL	COLOR		
1.	FR SH		TIP	RXD
2.	RX3+		SLEEVE	GND
3.	TXA3+			
4.	TX3	RED		
5.	GND	GREEN		
6.	RX3-			
7.	TXA3-			
8.	RX3	WHITE	RING	TXD
9.	NC			

(MOLDED CABLE)

NOTE:
WIRE COLORS MAY VARY
PER CABLE THAT IS USED
AND SUBSTITUTIONS IN COLORS
MAY OCCUR.

CABLE APPLICATION:
THIS CABLE IS USED TO INTERFACE BETWEEN
A BART "SER" RS-232 DB9F TO THE HORITA STANDARD
1/8" STEREO PHONEJACK SERIAL COMMUNICATION PORT.

TRIAD PRODUCTIONS, INC.

Title		
BART SERIAL C AND D TO HORITA SERIAL PORT		
Size	Document Number	REV
A	BARTCHOR.OCD	A
Date:	November 17, 1995	Sheet 1 of 1